



RUBY ELECTRICAL CORPORATION



About us

RUBY ELECTRICAL CORPORATION was established as a Solution Provider for Fixing and Support System Products to Industrial Applications. RUBY ELECTRICAL CORPORATION has since grown adequately with a pool of qualified and skilled personnel specialising in Industrial Support Systems and added Hazardous Area Product and Electrical Product Solutions to our capabilities. RUBY ELECTRICAL CORPORATION is exposed to a wide array of Electrical and Mechanical requirements of the consultants, contractors and wholesale vendors. Our aim is to become the Preferred Partner to industries such as Oil and Gas, Marine and Offshore, Industrial Construction, Telecommunication, Power Plants, Railway and other related Industrial users to meet their supply and requisition needs.

Our Mission

To deliver Better Innovative Solutions to the industry key to our success. Being the best we can be is our motto.

Mission Statement

Our commitment is to bring quality solutions to the markets that we serve. Knowing the markets that we serve is the key to our success. Being the best we can be is our motto.



INDEX

Stainless Steel Cable Ties Features	4
Stainless Steel Roller Lock Cable Ties	6
Stainless Steel Ladder Cable Ties	9
Stainless Steel Releasable Lock Cable Ties	11
PVC Coated Bands and Buckles	13
Sign Mounting Brackets	14
Precut Assembled Band Straps	15
Identification Systems	16
Marker Plates and Tags	17



PRODUCT APPLICATIONS



Shipping



Signals & Signages



Power Utilities



Cable Installation



Oil & Petrochemical



Communication



Refineries & Industries



Stainless Steel Cable Ties

Stainless steel cable ties are the most reliable and reputed brand delivering high quality engineered cable ties which provide solutions to all your clamping requirements. Cable ties are used in varied industries and perform host of other clamping solutions worldwide.

Stainless steel cable ties are uniquely designed and subjected to rigorous physical and chemical testing to ensure compliance with the international quality standards and safety of your clamping functions. The cable ties have burr free and rounded edges which makes them suitable for fast and easy applications. The cable ties are designed to withstand harsh environments and can be operated manually or by hand tool.

Cable ties are offered in both AISI 304 (EN DIN 1.4301) and AISI 316 (EN DIN 1.4401) stainless steel grade. The cable ties are available in coated & uncoated types. The cable ties can be used for indoor, outdoor and underground applications.

RUBY ELECTRICAL CORPORATION pioneers in providing engineering solutions including designing, testing, validation and stimulation that can modify standard clamping solutions or develop new solutions for your specific project needs.





Stainless Steel Roller Lock Type Cable Ties


Stainless Steel Roller lock cable ties are uniquely designed for self-locking mechanism. The strong locking system incorporating a steel ball, burr free edges and the rigorous testing procedures makes them the ideal choice for fast and easy installations which can be operated manually or by hand tool safely.

Product Features


Self-Locking ball lock design allows fast and easy installations Available in AISI 304 (EN DIN 1.4301) and AISI 316 (EN DIN 1.4401) stainless steel grade Sizes offered in (0.18") 4.6mm and (0.31") 7.9mm regular width and (0.47") 12mm heavy duty width Length as per customer's requirements without limits Suitable for Indoor and Outdoor applications High Strength, Corrosion resistant, Non-flammable, Non-toxic and UV- resistant UL under process, ROHS compliant according to EU directive

Self ball lock Mechanism

1. Initial Position

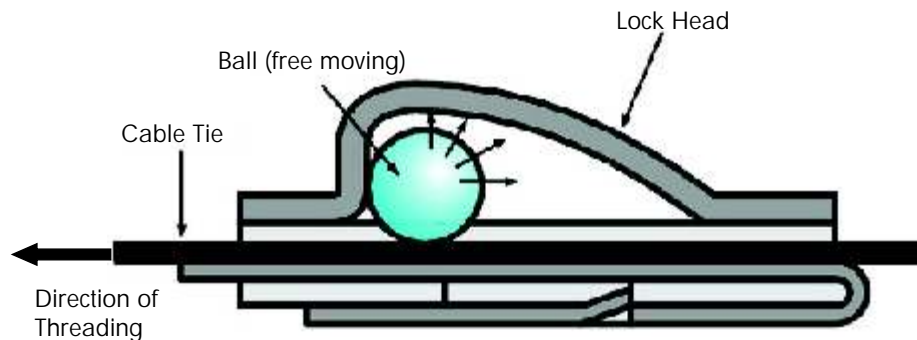

2. Final Lock Position

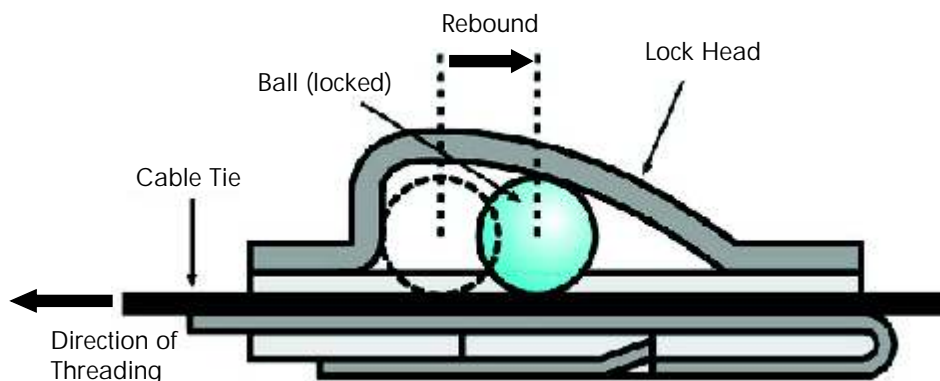



Stainless Steel Roller Lock Cable Ties, Uncoated

Technical Features

Metallic surface finish

Temperature range -80 °C to +500 °C

Fireproof, UV resistant



Roller Lock Uncoated- SS304, 4.6mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
RU44-100	SS304	0.18	4.6	4	100	0.01	0.25	1.1	27	667	150	100/bag
RU44-150	SS304	0.18	4.6	6	150	0.01	0.25	1.7	43	667	150	100/bag
RU44-200	SS304	0.18	4.6	8	200	0.01	0.25	2.3	59	667	150	100/bag
RU44-260	SS304	0.18	4.6	10	260	0.01	0.25	3.1	78	667	150	100/bag
RU44-360	SS304	0.18	4.6	14	360	0.01	0.25	4.3	110	667	150	100/bag
RU44-520	SS304	0.18	4.6	20	520	0.01	0.25	6.3	161	667	150	100/bag
RU44-620	SS304	0.18	4.6	24	620	0.01	0.25	7.6	192	667	150	100/bag
RU44-840	SS304	0.18	4.6	33	840	0.01	0.25	10.4	263	667	150	100/bag
RU44-1000	SS304	0.18	4.6	39	1000	0.01	0.25	12.3	313	667	150	100/bag

Roller Lock Uncoated- SS316, 4.6mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
RU64-100	SS316	0.18	4.6	4	100	0.01	0.25	1.1	27	667	150	100/bag
RU64-150	SS316	0.18	4.6	6	150	0.01	0.25	1.7	43	667	150	100/bag
RU64-200	SS316	0.18	4.6	8	200	0.01	0.25	2.3	59	667	150	100/bag
RU64-260	SS316	0.18	4.6	10	260	0.01	0.25	3.1	78	667	150	100/bag
RU64-360	SS316	0.18	4.6	14	360	0.01	0.25	4.3	110	667	150	100/bag
RU64-520	SS316	0.18	4.6	20	520	0.01	0.25	6.3	161	667	150	100/bag
RU64-620	SS316	0.18	4.6	24	620	0.01	0.25	7.6	192	667	150	100/bag
RU64-840	SS316	0.18	4.6	33	840	0.01	0.25	10.4	263	667	150	100/bag
RU64-1000	SS316	0.18	4.6	39	1000	0.01	0.25	12.3	313	667	150	100/bag

Roller Lock Uncoated- SS304, 7.9mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
RU47-100	SS304	0.31	7.9	4	100	0.01	0.25	1.1	27	1335	300	100/bag
RU47-150	SS304	0.31	7.9	6	150	0.01	0.25	1.7	43	1335	300	100/bag
RU47-200	SS304	0.31	7.9	8	200	0.01	0.25	2.3	59	1335	300	100/bag
RU47-260	SS304	0.31	7.9	10	260	0.01	0.25	3.1	78	1335	300	100/bag
RU47-360	SS304	0.31	7.9	14	360	0.01	0.25	4.3	110	1335	300	100/bag
RU47-520	SS304	0.31	7.9	20	520	0.01	0.25	6.3	161	1335	300	100/bag
RU47-620	SS304	0.31	7.9	24	620	0.01	0.25	7.6	192	1335	300	100/bag
RU47-840	SS304	0.31	7.9	33	840	0.01	0.25	10.4	263	1335	300	100/bag
RU47-1000	SS304	0.31	7.9	39	1000	0.01	0.25	12.3	313	1335	300	100/bag

Roller Lock Uncoated- SS316, 7.9mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
RU67-100	SS316	0.31	7.9	4	100	0.01	0.25	1.1	27	1335	300	100/bag
RU67-150	SS316	0.31	7.9	6	150	0.01	0.25	1.7	43	1335	300	100/bag
RU67-200	SS316	0.31	7.9	8	200	0.01	0.25	2.3	59	1335	300	100/bag
RU67-260	SS316	0.31	7.9	10	260	0.01	0.25	3.1	78	1335	300	100/bag
RU67-360	SS316	0.31	7.9	14	360	0.01	0.25	4.3	110	1335	300	100/bag
RU67-520	SS316	0.31	7.9	20	520	0.01	0.25	6.3	161	1335	300	100/bag
RU67-620	SS316	0.31	7.9	24	620	0.01	0.25	7.6	192	1335	300	100/bag
RU67-840	SS316	0.31	7.9	33	840	0.01	0.25	10.4	263	1335	300	100/bag
RU67-1000	SS316	0.31	7.9	39	1000	0.01	0.25	12.3	313	1335	300	100/bag



Stainless Steel Roller Lock Cable Ties, Coated

Technical Features

Black surface finish

Epoxy and Pure Polyester Coating

Temperature range -80 °C to +150 °C

Fireproof, UV resistant and Halogen free



Roller Lock Coated- SS304, 4.6mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
RC44-100	SS304	0.18	4.6	4	100	0.01	0.25	1.1	27	667	150	100/bag
RC44-150	SS304	0.18	4.6	6	150	0.01	0.25	1.7	43	667	150	100/bag
RC44-200	SS304	0.18	4.6	8	200	0.01	0.25	2.3	59	667	150	100/bag
RC44-260	SS304	0.18	4.6	10	260	0.01	0.25	3.1	78	667	150	100/bag
RC44-360	SS304	0.18	4.6	14	360	0.01	0.25	4.3	110	667	150	100/bag
RC44-520	SS304	0.18	4.6	20	520	0.01	0.25	6.3	161	667	150	100/bag
RC44-620	SS304	0.18	4.6	24	620	0.01	0.25	7.6	192	667	150	100/bag
RC44-840	SS304	0.18	4.6	33	840	0.01	0.25	10.4	263	667	150	100/bag
RC44-1000	SS304	0.18	4.6	39	1000	0.01	0.25	12.3	313	667	150	100/bag

Roller Lock Coated- SS316, 4.6mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
RC64-100	SS316	0.18	4.6	4	100	0.01	0.25	1.1	27	667	150	100/bag
RC64-150	SS316	0.18	4.6	6	150	0.01	0.25	1.7	43	667	150	100/bag
RC64-200	SS316	0.18	4.6	8	200	0.01	0.25	2.3	59	667	150	100/bag
RC64-260	SS316	0.18	4.6	10	260	0.01	0.25	3.1	78	667	150	100/bag
RC64-360	SS316	0.18	4.6	14	360	0.01	0.25	4.3	110	667	150	100/bag
RC64-520	SS316	0.18	4.6	20	520	0.01	0.25	6.3	161	667	150	100/bag
RC64-620	SS316	0.18	4.6	24	620	0.01	0.25	7.6	192	667	150	100/bag
RC64-840	SS316	0.18	4.6	33	840	0.01	0.25	10.4	263	667	150	100/bag
RC64-1000	SS316	0.18	4.6	39	1000	0.01	0.25	12.3	313	667	150	100/bag

Roller Lock Coated- SS304, 7.9mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
RC47-100	SS304	0.31	7.9	4	100	0.01	0.25	1.1	27	1335	300	100/bag
RC47-150	SS304	0.31	7.9	6	150	0.01	0.25	1.7	43	1335	300	100/bag
RC47-200	SS304	0.31	7.9	8	200	0.01	0.25	2.3	59	1335	300	100/bag
RC47-260	SS304	0.31	7.9	10	260	0.01	0.25	3.1	78	1335	300	100/bag
RC47-360	SS304	0.31	7.9	14	360	0.01	0.25	4.3	110	1335	300	100/bag
RC47-520	SS304	0.31	7.9	20	520	0.01	0.25	6.3	161	1335	300	100/bag
RC47-620	SS304	0.31	7.9	24	620	0.01	0.25	7.6	192	1335	300	100/bag
RC47-840	SS304	0.31	7.9	33	840	0.01	0.25	10.4	263	1335	300	100/bag
RC47-1000	SS304	0.31	7.9	39	1000	0.01	0.25	12.3	313	1335	300	100/bag

Roller Lock Coated- SS316, 7.9mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
RC67-100	SS316	0.31	7.9	4	100	0.01	0.25	1.1	27	1335	300	100/bag
RC67-150	SS316	0.31	7.9	6	150	0.01	0.25	1.7	43	1335	300	100/bag
RC67-200	SS316	0.31	7.9	8	200	0.01	0.25	2.3	59	1335	300	100/bag
RC67-260	SS316	0.31	7.9	10	260	0.01	0.25	3.1	78	1335	300	100/bag
RC67-360	SS316	0.31	7.9	14	360	0.01	0.25	4.3	110	1335	300	100/bag
RC67-520	SS316	0.31	7.9	20	520	0.01	0.25	6.3	161	1335	300	100/bag
RC67-620	SS316	0.31	7.9	24	620	0.01	0.25	7.6	192	1335	300	100/bag
RC67-840	SS316	0.31	7.9	33	840	0.01	0.25	10.4	263	1335	300	100/bag
RC67-1000	SS316	0.31	7.9	39	1000	0.01	0.25	12.3	313	1335	300	100/bag



Stainless Steel Roller Lock Cable Ties, Heavy Duty

Technical Features

- Epoxy and Pure Polyester Coating
- Surface finish Metallic (Uncoated) and Black (Coated)
- Temperature range -80 °C to +500 °C (Uncoated)
-80 °C to +150°C (Coated)
- Fireproof, UV resistant and Halogen free



Roller Lock Uncoated- SS304, 12.0mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
RU412-100	SS304	0.47	12.0	4	100	0.02	0.40	1.1	27	3115	700	100/bag
RU412-150	SS304	0.47	12.0	6	150	0.02	0.40	1.7	43	3115	700	100/bag
RU412-200	SS304	0.47	12.0	8	200	0.02	0.40	2.3	59	3115	700	100/bag
RU412-260	SS304	0.47	12.0	10	260	0.02	0.40	3.1	78	3115	700	100/bag
RU412-360	SS304	0.47	12.0	14	360	0.02	0.40	4.3	110	3115	700	100/bag
RU412-520	SS304	0.47	12.0	20	520	0.02	0.40	6.3	161	3115	700	100/bag
RU412-620	SS304	0.47	12.0	24	620	0.02	0.40	7.6	192	3115	700	100/bag
RU412-840	SS304	0.47	12.0	33	840	0.02	0.40	10.4	263	3115	700	100/bag
RU412-1000	SS304	0.47	12.0	39	1000	0.02	0.40	12.3	313	3115	700	100/bag

Roller Lock Uncoated- SS316, 12.0mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
RU612-100	SS316	0.47	12.0	4	100	0.02	0.40	1.1	27	3115	700	100/bag
RU612-150	SS316	0.47	12.0	6	150	0.02	0.40	1.7	43	3115	700	100/bag
RU612-200	SS316	0.47	12.0	8	200	0.02	0.40	2.3	59	3115	700	100/bag
RU612-260	SS316	0.47	12.0	10	260	0.02	0.40	3.1	78	3115	700	100/bag
RU612-360	SS316	0.47	12.0	14	360	0.02	0.40	4.3	110	3115	700	100/bag
RU612-520	SS316	0.47	12.0	20	520	0.02	0.40	6.3	161	3115	700	100/bag
RU612-620	SS316	0.47	12.0	24	620	0.02	0.40	7.6	192	3115	700	100/bag
RU612-840	SS316	0.47	12.0	33	840	0.02	0.40	10.4	263	3115	700	100/bag
RU612-1000	SS316	0.47	12.0	39	1000	0.02	0.40	12.3	313	3115	700	100/bag

Roller Lock Coated- SS304, 12.0mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
RC412-100	SS304	0.47	12.0	4	100	0.02	0.40	1.1	27	3115	700	100/bag
RC412-150	SS304	0.47	12.0	6	150	0.02	0.40	1.7	43	3115	700	100/bag
RC412-200	SS304	0.47	12.0	8	200	0.02	0.40	2.3	59	3115	700	100/bag
RC412-260	SS304	0.47	12.0	10	260	0.02	0.40	3.1	78	3115	700	100/bag
RC412-360	SS304	0.47	12.0	14	360	0.02	0.40	4.3	110	3115	700	100/bag
RC412-520	SS304	0.47	12.0	20	520	0.02	0.40	6.3	161	3115	700	100/bag
RC412-620	SS304	0.47	12.0	24	620	0.02	0.40	7.6	192	3115	700	100/bag
RC412-840	SS304	0.47	12.0	33	840	0.02	0.40	10.4	263	3115	700	100/bag
RC412-1000	SS304	0.47	12.0	39	1000	0.02	0.40	12.3	313	3115	700	100/bag

Roller Lock Coated- SS316, 12.0mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
RC612-100	SS316	0.47	12.0	4	100	0.02	0.40	1.1	27	3115	700	100/bag
RC612-150	SS316	0.47	12.0	6	150	0.02	0.40	1.7	43	3115	700	100/bag
RC612-200	SS316	0.47	12.0	8	200	0.02	0.40	2.3	59	3115	700	100/bag
RC612-260	SS316	0.47	12.0	10	260	0.02	0.40	3.1	78	3115	700	100/bag
RC612-360	SS316	0.47	12.0	14	360	0.02	0.40	4.3	110	3115	700	100/bag
RC612-520	SS316	0.47	12.0	20	520	0.02	0.40	6.3	161	3115	700	100/bag
RC612-620	SS316	0.47	12.0	24	620	0.02	0.40	7.6	192	3115	700	100/bag
RC612-840	SS316	0.47	12.0	33	840	0.02	0.40	10.4	263	3115	700	100/bag
RC612-1000	SS316	0.47	12.0	39	1000	0.02	0.40	12.3	313	3115	700	100/bag




Stainless Steel Step Lock Cable Tie, Uncoated

Technical Features

Metallic surface finish

Temperature range -80 °C to +500 °C

Fireproof, UV resistant

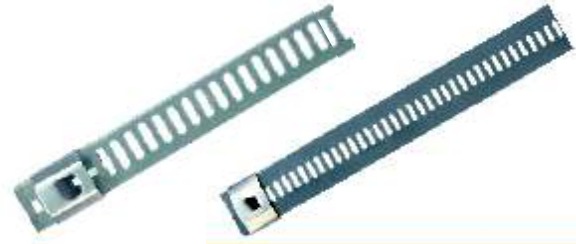

Step Lock Type Uncoated- SS304, 7mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
SU47-150	SS304	0.28	7.0	6	150	0.012	0.30	1.9	48	667	150	100/bag
SU47-200	SS304	0.28	7.0	8	200	0.012	0.30	2.5	64	667	150	100/bag
SU47-225	SS304	0.28	7.0	9	225	0.012	0.30	2.8	71	667	150	100/bag
SU47-250	SS304	0.28	7.0	10	250	0.012	0.30	3.1	80	667	150	100/bag
SU47-300	SS304	0.28	7.0	12	300	0.012	0.30	3.8	96	667	150	100/bag
SU47-360	SS304	0.28	7.0	14	360	0.012	0.30	4.5	114	667	150	100/bag
SU47-450	SS304	0.28	7.0	18	450	0.012	0.30	5.6	142	667	150	100/bag
SU47-600	SS304	0.28	7.0	24	600	0.012	0.30	7.5	190	667	150	100/bag
SU47-610	SS304	0.28	7.0	24	610	0.012	0.30	7.6	194	667	150	100/bag
SU47-750	SS304	0.28	7.0	30	750	0.012	0.30	9.4	238	667	150	100/bag
SU47-1000	SS304	0.28	7.0	39	1000	0.012	0.30	12.5	318	667	150	100/bag

Step Lock Type Uncoated- SS316, 7mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
SU67-150	SS316	0.28	7.0	6	150	0.012	0.30	1.9	48	667	150	100/bag
SU67-200	SS316	0.28	7.0	8	200	0.012	0.30	2.5	64	667	150	100/bag
SU67-225	SS316	0.28	7.0	9	225	0.012	0.30	2.8	71	667	150	100/bag
SU67-250	SS316	0.28	7.0	10	250	0.012	0.30	3.1	80	667	150	100/bag
SU67-300	SS316	0.28	7.0	12	300	0.012	0.30	3.8	96	667	150	100/bag
SU67-360	SS316	0.28	7.0	14	360	0.012	0.30	4.5	114	667	150	100/bag
SU67-450	SS316	0.28	7.0	18	450	0.012	0.30	5.6	142	667	150	100/bag
SU67-600	SS316	0.28	7.0	24	600	0.012	0.30	7.5	190	667	150	100/bag
SU67-610	SS316	0.28	7.0	24	610	0.012	0.30	7.6	194	667	150	100/bag
SU67-750	SS316	0.28	7.0	30	750	0.012	0.30	9.4	238	667	150	100/bag
SU67-1000	SS316	0.28	7.0	39	1000	0.012	0.30	12.5	318	667	150	100/bag

Step Lock Type Uncoated- SS304, 12mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
SU412-150	SS304	0.47	12.0	6	150	0.012	0.30	1.9	48	1335	300	100/bag
SU412-200	SS304	0.47	12.0	8	200	0.012	0.30	2.5	64	1335	300	100/bag
SU412-225	SS304	0.47	12.0	9	225	0.012	0.30	2.8	71	1335	300	100/bag
SU412-250	SS304	0.47	12.0	10	250	0.012	0.30	3.1	80	1335	300	100/bag
SU412-300	SS304	0.47	12.0	12	300	0.012	0.30	3.8	96	1335	300	100/bag
SU412-360	SS304	0.47	12.0	14	360	0.012	0.30	4.5	114	1335	300	100/bag
SU412-450	SS304	0.47	12.0	18	450	0.012	0.30	5.6	142	1335	300	100/bag
SU412-600	SS304	0.47	12.0	24	600	0.012	0.30	7.5	190	1335	300	100/bag
SU412-610	SS304	0.47	12.0	24	610	0.012	0.30	7.6	194	1335	300	100/bag
SU412-750	SS304	0.47	12.0	30	750	0.012	0.30	9.4	238	1335	300	100/bag
SU412-1000	SS304	0.47	12.0	39	1000	0.012	0.30	12.5	318	1335	300	100/bag

Step Lock Type Uncoated- SS316, 12mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
SU612-150	SS316	0.47	12.0	6	150	0.012	0.30	1.9	48	1335	300	100/bag
SU612-200	SS316	0.47	12.0	8	200	0.012	0.30	2.5	64	1335	300	100/bag
SU612-225	SS316	0.47	12.0	9	225	0.012	0.30	2.8	71	1335	300	100/bag
SU612-250	SS316	0.47	12.0	10	250	0.012	0.30	3.1	80	1335	300	100/bag
SU612-300	SS316	0.47	12.0	12	300	0.012	0.30	3.8	96	1335	300	100/bag
SU612-360	SS316	0.47	12.0	14	360	0.012	0.30	4.5	114	1335	300	100/bag
SU612-450	SS316	0.47	12.0	18	450	0.012	0.30	5.6	142	1335	300	100/bag
SU612-600	SS316	0.47	12.0	24	600	0.012	0.30	7.5	190	1335	300	100/bag
SU612-610	SS316	0.47	12.0	24	610	0.012	0.30	7.6	194	1335	300	100/bag
SU612-750	SS316	0.47	12.0	30	750	0.012	0.30	9.4	238	1335	300	100/bag
SU612-1000	SS316	0.47	12.0	39	1000	0.012	0.30	12.5	318	1335	300	100/bag



Stainless Steel Step Lock Cable Tie, Coated

Technical Features

Black surface finish

Pure Polyester Coating

Temperature range -80 °C to +150 °C

Fireproof, UV resistant and Halogen free



Step Lock Type Coated- SS304, 7mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
SC47-150	SS304	0.28	7.0	6	150	0.012	0.30	1.9	48	667	150	100/bag
SC47-200	SS304	0.28	7.0	8	200	0.012	0.30	2.5	64	667	150	100/bag
SC47-225	SS304	0.28	7.0	9	225	0.012	0.30	2.8	71	667	150	100/bag
SC47-250	SS304	0.28	7.0	10	250	0.012	0.30	3.1	80	667	150	100/bag
SC47-300	SS304	0.28	7.0	12	300	0.012	0.30	3.8	96	667	150	100/bag
SC47-360	SS304	0.28	7.0	14	360	0.012	0.30	4.5	114	667	150	100/bag
SC47-450	SS304	0.28	7.0	18	450	0.012	0.30	5.6	142	667	150	100/bag
SC47-600	SS304	0.28	7.0	24	600	0.012	0.30	7.5	190	667	150	100/bag
SC47-610	SS304	0.28	7.0	24	610	0.012	0.30	7.6	194	667	150	100/bag
SC47-750	SS304	0.28	7.0	30	750	0.012	0.30	9.4	238	667	150	100/bag
SC47-1000	SS304	0.28	7.0	39	1000	0.012	0.30	12.5	318	667	150	100/bag

Stepladder Type Coated- SS316, 7mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
SC67-150	SS316	0.28	7.0	6	150	0.012	0.30	1.9	48	667	150	100/bag
SC67-200	SS316	0.28	7.0	8	200	0.012	0.30	2.5	64	667	150	100/bag
SC67-225	SS316	0.28	7.0	9	225	0.012	0.30	2.8	71	667	150	100/bag
SC67-250	SS316	0.28	7.0	10	250	0.012	0.30	3.1	80	667	150	100/bag
SC67-300	SS316	0.28	7.0	12	300	0.012	0.30	3.8	96	667	150	100/bag
SC67-360	SS316	0.28	7.0	14	360	0.012	0.30	4.5	114	667	150	100/bag
SC67-450	SS316	0.28	7.0	18	450	0.012	0.30	5.6	142	667	150	100/bag
SC67-600	SS316	0.28	7.0	24	600	0.012	0.30	7.5	190	667	150	100/bag
SC67-610	SS316	0.28	7.0	24	610	0.012	0.30	7.6	194	667	150	100/bag
SC67-750	SS316	0.28	7.0	30	750	0.012	0.30	9.4	238	667	150	100/bag
SC67-1000	SS316	0.28	7.0	39	1000	0.012	0.30	12.5	318	667	150	100/bag

Stepladder Type Coated- SS304, 12mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
SC412-150	SS304	0.47	12.0	6	150	0.012	0.30	1.9	48	1335	300	100/bag
SC412-200	SS304	0.47	12.0	8	200	0.012	0.30	2.5	64	1335	300	100/bag
SC412-225	SS304	0.47	12.0	9	225	0.012	0.30	2.8	71	1335	300	100/bag
SC412-250	SS304	0.47	12.0	10	250	0.012	0.30	3.1	80	1335	300	100/bag
SC412-300	SS304	0.47	12.0	12	300	0.012	0.30	3.8	96	1335	300	100/bag
SC412-360	SS304	0.47	12.0	14	360	0.012	0.30	4.5	114	1335	300	100/bag
SC412-450	SS304	0.47	12.0	18	450	0.012	0.30	5.6	142	1335	300	100/bag
SC412-600	SS304	0.47	12.0	24	600	0.012	0.30	7.5	190	1335	300	100/bag
SC412-610	SS304	0.47	12.0	24	610	0.012	0.30	7.6	194	1335	300	100/bag
SC412-750	SS304	0.47	12.0	30	750	0.012	0.30	9.4	238	1335	300	100/bag
SC412-1000	SS304	0.47	12.0	39	1000	0.012	0.30	12.5	318	1335	300	100/bag

Stepladder Type Coated- SS316, 12mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
SC612-150	SS316	0.47	12.0	6	150	0.012	0.30	1.9	48	1335	300	100/bag
SC612-200	SS316	0.47	12.0	8	200	0.012	0.30	2.5	64	1335	300	100/bag
SC612-225	SS316	0.47	12.0	9	225	0.012	0.30	2.8	71	1335	300	100/bag
SC612-250	SS316	0.47	12.0	10	250	0.012	0.30	3.1	80	1335	300	100/bag
SC612-300	SS316	0.47	12.0	12	300	0.012	0.30	3.8	96	1335	300	100/bag
SC612-360	SS316	0.47	12.0	14	360	0.012	0.30	4.5	114	1335	300	100/bag
SC612-450	SS316	0.47	12.0	18	450	0.012	0.30	5.6	142	1335	300	100/bag
SC612-600	SS316	0.47	12.0	24	600	0.012	0.30	7.5	190	1335	300	100/bag
SC612-610	SS316	0.47	12.0	24	610	0.012	0.30	7.6	194	1335	300	100/bag
SC612-750	SS316	0.47	12.0	30	750	0.012	0.30	9.4	238	1335	300	100/bag
SC612-1000	SS316	0.47	12.0	39	1000	0.012	0.30	12.5	318	1335	300	100/bag



Stainless Steel Releasable Lock Cable Tie, Uncoated

Technical Features

Metallic surface finish

Temperature range -80 °C to +500 °C

Fireproof, UV resistant



Releasable Lock Type Uncoated- SS304, 6.35mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
RLU46-152	SS304	1/4	6.35	6	152	0.02	0.50	1.5	38	1335	300	100/bag
RLU46-229	SS304	1/4	6.35	9	229	0.02	0.50	2.5	63	1335	300	100/bag
RLU46-305	SS304	1/4	6.35	12	305	0.02	0.50	3.4	86	1335	300	100/bag
RLU46-457	SS304	1/4	6.35	18	457	0.02	0.50	5.4	137	1335	300	100/bag
RLU46-610	SS304	1/4	6.35	24	610	0.02	0.50	7.3	185	1335	300	100/bag
RLU46-762	SS304	1/4	6.35	30	762	0.02	0.50	9.1	231	1335	300	100/bag
RLU46-914	SS304	1/4	6.35	36	914	0.02	0.50	11.0	280	1335	300	100/bag

Releasable Lock Type Uncoated- SS316, 6.35mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
RLU66-152	SS316	1/4	6.35	6	152	0.02	0.50	1.5	38	1335	300	100/bag
RLU66-229	SS316	1/4	6.35	9	229	0.02	0.50	2.5	63	1335	300	100/bag
RLU66-305	SS316	1/4	6.35	12	305	0.02	0.50	3.4	86	1335	300	100/bag
RLU66-457	SS316	1/4	6.35	18	457	0.02	0.50	5.4	137	1335	300	100/bag
RLU66-610	SS316	1/4	6.35	24	610	0.02	0.50	7.3	185	1335	300	100/bag
RLU66-762	SS316	1/4	6.35	30	762	0.02	0.50	9.1	231	1335	300	100/bag
RLU66-914	SS316	1/4	6.35	36	914	0.02	0.50	11.0	280	1335	300	100/bag

Releasable Lock Type Uncoated- SS304, 9.53mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
RLU49-152	SS304	3/8	9.53	6	152	0.02	0.50	1.5	38	2003	450	100/bag
RLU49-229	SS304	3/8	9.53	9	229	0.02	0.50	2.5	63	2003	450	100/bag
RLU49-305	SS304	3/8	9.53	12	305	0.02	0.50	3.4	86	2003	450	100/bag
RLU49-457	SS304	3/8	9.53	18	457	0.02	0.50	5.4	137	2003	450	100/bag
RLU49-610	SS304	3/8	9.53	24	610	0.02	0.50	7.3	185	2003	450	100/bag
RLU49-762	SS304	3/8	9.53	30	762	0.02	0.50	9.1	231	2003	450	100/bag
RLU49-914	SS304	3/8	9.53	36	914	0.02	0.50	11.0	280	2003	450	100/bag

Releasable Lock Type Uncoated- SS316, 9.53mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
RLU69-152	SS316	3/8	9.53	6	152	0.02	0.50	1.5	38	2003	450	100/bag
RLU69-229	SS316	3/8	9.53	9	229	0.02	0.50	2.5	63	2003	450	100/bag
RLU69-305	SS316	3/8	9.53	12	305	0.02	0.50	3.4	86	2003	450	100/bag
RLU69-457	SS316	3/8	9.53	18	457	0.02	0.50	5.4	137	2003	450	100/bag
RLU69-610	SS316	3/8	9.53	24	610	0.02	0.50	7.3	185	2003	450	100/bag
RLU69-762	SS316	3/8	9.53	30	762	0.02	0.50	9.1	231	2003	450	100/bag
RLU69-914	SS316	3/8	9.53	36	914	0.02	0.50	11.0	280	2003	450	100/bag



Stainless Steel Releasable Lock Cable Tie, Coated

Stainless steel Releasable lock cable ties feature single structured strip with unique buckle design which can be bent over to provide special strength for reliable and easy installations. The cable ties are releasable and can be unfastened for reuse giving it a distinct advantage in using for multiple installations over long time period.

Technical Features

PPA 571 Coating
 Black surface finish
 Temperature range -80°C to +150 °C
 Fireproof, UV resistant and Halogen free

Product Features

PPA 571 (Performance Polymer Alloy Coating)
 Releasable and reusable
 Available in AISI 316 non-magnetic stainless steel grade
 Provides good abrasion and impact resistance
 Fast and easy installations
 Provides high corrosion resistance
 Flexible at low temperatures
 Protects cables from damage
 Smooth rounded edges
 Non-flammable, Non-Toxic
 Excellent resistance to stress cracking on bending
 Used in indoor, outdoor and underground applications



Releasable Lock Type PPA Coated- SS316, 6.35mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
RPC66-152	SS316	1/4	6.35	6	152	0.043	1.10	1.5	38	1469	330	100/bag
RPC66-229	SS316	1/4	6.35	9	229	0.043	1.10	2.5	63	1469	330	100/bag
RPC66-305	SS316	1/4	6.35	12	305	0.043	1.10	3.4	86	1469	330	100/bag
RPC66-457	SS316	1/4	6.35	18	457	0.043	1.10	5.4	137	1469	330	100/bag
RPC66-610	SS316	1/4	6.35	24	610	0.043	1.10	7.3	185	1469	330	100/bag
RPC66-762	SS316	1/4	6.35	30	762	0.043	1.10	9.1	231	1469	330	100/bag
RPC66-914	SS316	1/4	6.35	36	914	0.043	1.10	11.0	280	1469	330	100/bag

Releasable Lock Type PPA Coated- SS316, 9.53mm width

Part No.	Material	Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
		In	mm	In	mm	In	mm	In	mm	N	lbs	
RPC69-152	SS316	3/8	9.53	6	152	0.043	1.10	1.5	38	2003	450	100/bag
RPC69-229	SS316	3/8	9.53	9	229	0.043	1.10	2.5	63	2003	450	100/bag
RPC69-305	SS316	3/8	9.53	12	305	0.043	1.10	3.4	86	2003	450	100/bag
RPC69-457	SS316	3/8	9.53	18	457	0.043	1.10	5.4	137	2003	450	100/bag
RPC69-610	SS316	3/8	9.53	24	610	0.043	1.10	7.3	185	2003	450	100/bag
RPC69-762	SS316	3/8	9.53	30	762	0.043	1.10	9.1	231	2003	450	100/bag
RPC69-914	SS316	3/8	9.53	36	914	0.043	1.10	11.0	280	2003	450	100/bag



PVC Coated Bands



Features

- A valuable solution for your coated straps requirements
- Suitable Buckles and Tools are supplied as a total solution
- Corrosion resistance in harsh offshore environments
- Superior tensile strength for cable bundling
- Excellent chemical resistance and low moisture

PVC COATED BAND

PVC Band Type Coated -SS304

Part No.	Material	Width		Thickness		Finished Length		Average Breaking		Package Quantity
		In	mm	In	mm	Feet	Mtr	N	Lbs	
ACB412-25	SS304	1/2	12.7	0.04	1.10	82.5	25	2980	670	82.5'/roll
ACB416-25	SS304	5/8	16.0	0.04	1.10	82.5	25	3740	840	82.5'/roll

PVC Band Type Coated - SS316

Part No.	Material	Width		Thickness		Finished Length		Average Breaking		Package Quantity
		in	mm	In	mm	Feet	Mtr	N	Lbs	
ACB612-25	SS316	1/2	12.7	0.04	1.10	82.5	25	2980	670	82.5'/roll
ACB616-25	SS316	5/8	16.0	0.04	1.10	82.5	25	3740	840	82.5'/roll

Buckles



Buckles - Jaw Type Uncoated

Part No.	Material	Width		Package Quantity
		H	mm	
ABU406J	SS304	1/4	6.5	100/box
ABU409J	SS304	3/8	9.5	100/box
ABU410J	SS304	2/5	10.0	100/box
ABU412J	SS304	1/2	12.7	100/box
ABU416J	SS304	5/8	16.0	100/box
ABU419J	SS304	3/4	19.0	100/box
ABU420J	SS304	4/5	20.0	100/box

Buckles - Wing Tye Uncoated

Part No.	Material	Width		Package Quantity
		H	mm	
ABU406W	SS304	1/4	6.5	100/box
ABU409W	SS304	3/8	9.5	100/box
ABU410W	SS304	2/5	10.0	100/box
ABU412W	SS304	1/2	12.7	100/box
ABU416W	SS304	5/8	16.0	100/box
ABU419W	SS304	3/4	19.0	100/box
ABU420W	SS304	4/5	20.0	100/box

ABU606J	SS316	1/4	6.5	100/box
ABU609J	SS316	3/8	9.5	100/box
ABU610J	SS316	2/5	10.0	100/box
ABU612J	SS316	1/2	12.7	100/box
ABU616J	SS316	5/8	16.0	100/box
ABU619J	SS316	3/4	19.0	100/box
ABU620J	SS316	4/5	20.0	100/box

ABU606W	SS316	1/4	6.5	100/box
ABU609W	SS316	3/8	9.5	100/box
ABU610W	SS316	2/5	10.0	100/box
ABU612W	SS316	1/2	12.7	100/box
ABU616W	SS316	5/8	16.0	100/box
ABU619W	SS316	3/4	19.0	100/box
ABU620W	SS316	4/5	20.0	100/box

Sign Mounting Brackets

Sign mounting brackets are made from high tensile stainless steel grade which offers corrosion resistance and withstands stress. The bolts are specifically made from corrosion resistant AISI 304 stainless steel grade of standard sizes.

Sign mounts are used for mounting on traffic signs, enclosures and various other objects. Withstands stress as mounts are made from high tensile stainless steel. Fibre washers are provided for better clamping and to absorb vibrations

Applications-

Securely attaches materials to items

Tightly attaches items to poles

Tightly attaches items together

SIGN MOUNTING BRACKETS

Single Bolt Bracket

Product Code	Description	Material Grade	Slot Size		Leg Type	Package Quantity	Product Image
			mm	In			
ABM112S	Straight Leg Small Bracket SS201, 1/2" slot	SS201	12.7	1/2	Straight	50/box	
ABM112SW	Straight Leg Small Bracket SS201, 1/2" slot with SS Bolt and Washer	SS201	12.7	1/2	Straight	50/box	
ABM112F	Flared Leg Small Bracket SS201, 1/2" slot	SS201	12.7	1/2	Flared	50/box	
ABM112FW	Straight Leg Small Bracket SS201, 1/2" slot with SS Bolt and Washer	SS201	12.7	1/2	Flared	50/box	

Regular Single Bolt Bracket

Product Code	Description	Material Grade	Slot Size		Leg Type	Package Quantity	Product Image
			mm	In			
ABS119S	Straight Leg Single Bolt Bracket SS201, 3/4" slot	SS201	19	3/4	Straight	50/box	
ABS119SW	Straight Leg Single Bolt Bracket SS201, 3/4" slot with SS Bolt and Washer	SS201	19	3/4	Straight	50/box	
ABS119F	Flared Leg Single Bolt Bracket SS201, 3/4" slot	SS201	19	3/4	Flared	50/box	
ABS119FW	Flared Leg Single Bolt Bracket SS201, 3/4" slot with SS Bolt and Washer	SS201	19	3/4	Flared	50/box	

Two Bolt Bracket

Product Code	Description	Material Grade	Slot Size		Leg Type	Package Quantity	Product Image
			mm	In			
ABT119S	Straight Leg Two Bolt Bracket SS201, 3/4" slot	SS201	19	3/4	Straight	50/box	
ABT119SW	Straight Leg Two Bolt Bracket SS201, 3/4" slot with SS Bolt and Washer	SS201	19	3/4	Straight	50/box	



Precut Assembled Straps

Features-

Ready to use pre-cut band and assembled with buckles jaw or wing type

Time saving & cost effective solution for large projects

SS 304, SS316 and SS 430 available on request



Jaw type Precut Strap

Part No.	Material	Width		Finished Length		Thickness		Max Diameter Single Loop		Max Diameter Double Wrap		Package Quantity
		In	mm	In	mm	In	mm	In	mm	In	mm	
PJ127-20	SS201	1/2	12.7	20	51	0.03	0.76	4	102	2	51	25/box
PJ127-24	SS201	1/2	12.7	24	61	0.03	0.76	5	127	2.5	64	25/box
PJ127-27	SS201	1/2	12.7	27	69	0.03	0.76	6	152	3	76	25/box
PJ127-34	SS201	1/2	12.7	34	86	0.03	0.76	8	203	4	102	25/box
PJ127-41	SS201	1/2	12.7	41	104	0.03	0.76	10	254	5	127	25/box
PJ127-48	SS201	1/2	12.7	48	122	0.03	0.76	12	305	6	152	25/box
PJ127-55	SS201	1/2	12.7	55	140	0.03	0.76	14	356	7	178	25/box
PJ127-69	SS201	1/2	12.7	69	175	0.03	0.76	18	457	9	229	25/box
PJ127-76	SS201	1/2	12.7	76	193	0.03	0.76	20	508	10	254	25/box
PJ127-90	SS201	1/2	12.7	90	229	0.03	0.76	24	610	12	305	25/box
PJ197-20	SS201	3/4	19.0	20	51	0.03	0.76	4	102	2	51	25/box
PJ197-24	SS201	3/4	19.0	24	61	0.03	0.76	5	127	2.5	64	25/box
PJ197-27	SS201	3/4	19.0	27	69	0.03	0.76	6	152	3	76	25/box
PJ197-34	SS201	3/4	19.0	34	86	0.03	0.76	8	203	4	102	25/box
PJ197-41	SS201	3/4	19.0	41	104	0.03	0.76	10	254	5	127	25/box
PJ197-48	SS201	3/4	19.0	48	122	0.03	0.76	12	305	6	152	25/box
PJ197-55	SS201	3/4	19.0	55	140	0.03	0.76	14	356	7	178	25/box
PJ197-69	SS201	3/4	19.0	69	175	0.03	0.76	18	457	9	229	25/box
PJ197-76	SS201	3/4	19.0	76	193	0.03	0.76	20	508	10	254	25/box
PJ197-90	SS201	3/4	19.0	90	229	0.03	0.76	24	610	12	305	25/box



Wing Type Precut Strap

Part No.	Material	Width		Finished Length		Thickness		Max Diameter Single Loop		Max Diameter Double Wrap		Package Quantity
		In	mm	In	mm	In	mm	In	mm	In	mm	
PW065-10	SS201	1/4	6.50	10	25	0.02	0.50	2	50			50/box
PW065-16	SS201	1/4	6.50	16	40	0.02	0.50	3.5	88	1.5	38	50/box
PW065-19	SS201	1/4	6.50	19	48	0.02	0.50	5	127	2.5	63	50/box
PW065-26	SS201	1/4	6.50	26	68	0.02	0.50	7	177	3.5	88	50/box
PW065-34	SS201	1/4	6.50	34	86	0.02	0.50	9	228	4.5	114	50/box
PW096-16	SS201	3/8	9.50	16	40	0.26	0.65	3.5	88	1.5	38	50/box
PW096-44	SS201	3/8	9.50	44	112	0.26	0.65	12	305	6	152	50/box
PW127-18	SS201	1/2	12.7	18	45	0.03	0.76	4	102	2	50	50/box
PW127-31	SS201	1/2	12.7	31	78	0.03	0.76	8	203	4	101	50/box
PW167-21	SS201	5/8	16.0	21	53	0.03	0.76	5	127	2.5	63	50/box
PW167-56	SS201	5/8	16.0	56	142	0.03	0.76	16	406	8	203	50/box
PW167-69	SS201	5/8	16.0	69	508	0.03	0.76	20	508	10	175	50/box
PW197-24	SS201	3/4	19.0	24	60	0.03	0.76	6	152	3	76	50/box
PW197-37	SS201	3/4	19.0	37	93	0.03	0.76	10	254	5	127	50/box
PW197-50	SS201	3/4	19.0	50	127	0.03	0.76	14	355	7	177	50/box
PW197-62	SS201	3/4	19.0	62	157	0.03	0.76	18	457	9	228	50/box

Identification Systems

Numeric Characters (Marker tags)

Part No.	Description	Material Grade	Package Quantity
AT A	A-LOC TAG A	SS316	100/bag
AT B	A-LOC TAG B	SS316	100/bag
AT C	A-LOC TAG C	SS316	100/bag
AT D	A-LOC TAG D	SS316	100/bag
AT E	A-LOC TAG E	SS316	100/bag
AT F	A-LOC TAG F	SS316	100/bag
AT G	A-LOC TAG G	SS316	100/bag
AT H	A-LOC TAG H	SS316	100/bag
AT I	A-LOC TAG I	SS316	100/bag
AT J	A-LOC TAG J	SS316	100/bag
AT K	A-LOC TAG K	SS316	100/bag
AT L	A-LOC TAG L	SS316	100/bag
AT M	A-LOC TAG M	SS316	100/bag
AT N	A-LOC TAG N	SS316	100/bag
AT O	A-LOC TAG O	SS316	100/bag
AT P	A-LOC TAG P	SS316	100/bag
AT Q	A-LOC TAG Q	SS316	100/bag
AT R	A-LOC TAG R	SS316	100/bag
AT S	A-LOC TAG S	SS316	100/bag
AT T	A-LOC TAG T	SS316	100/bag
AT U	A-LOC TAG U	SS316	100/bag
AT V	A-LOC TAG V	SS316	100/bag
AT W	A-LOC TAG W	SS316	100/bag
AT X	A-LOC TAG X	SS316	100/bag
AT Y	A-LOC TAG Y	SS316	100/bag
AT Z	A-LOC TAG Z	SS316	100/bag
AT 1	A-LOC TAG 1	SS316	100/bag
AT 2	A-LOC TAG 2	SS316	100/bag
AT 3	A-LOC TAG 3	SS316	100/bag
AT 4	A-LOC TAG 4	SS316	100/bag
AT 5	A-LOC TAG 5	SS316	100/bag
AT 6	A-LOC TAG 6	SS316	100/bag
AT 7	A-LOC TAG 7	SS316	100/bag
AT 8	A-LOC TAG 8	SS316	100/bag
AT 9	A-LOC TAG 9	SS316	100/bag
AT 0	A-LOC TAG 0	SS316	100/bag
AT	A-LOC TAG Blank	SS316	100/bag
AT +	A-LOC TAG Plus	SS316	100/bag
AT -	A-LOC TAG Minus	SS316	100/bag
AT ~	A-LOC TAG Sine	SS316	100/bag
AT ->	A-LOC TAG Arrow	SS316	100/bag
AT /	A-LOC TAG Slash	SS316	100/bag
AT &	A-LOC TAG And	SS316	100/bag
AT ±	A-LOC TAG Earth	SS316	100/bag

Features-


Stainless Steel SS 316. Easy to read in dim light and inaccessible places. Complete range of individual letters, numbers and symbols.

Carriers are fastened with a variety of cable ties Slide directly onto cable ties to create a self-contained wrap tag.

Carrier Strips are used to create your own carrier in multiple colours for identification



Marker Tags on Coated Carrier Strips

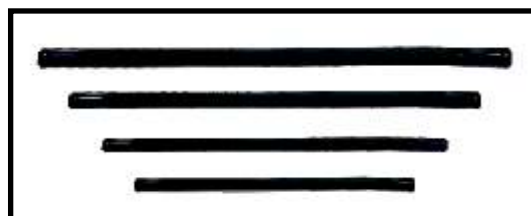

Coated Carrier Strips



Uncoated Carrier Strips

Carrier Strips- Uncoated

Product Code	Material Grade	Length		Width		Package Quantity
		mm	In	mm	In	
ID6	SS316	92.5	3.66	8	0.33	100/box
ID10	SS316	130.6	5.14	8	0.33	100/box
ID16	SS316	187.7	7.40	8	0.33	100/box

Carrier Strips- Coated

Product Code	Material Grade	Length		Width		Package Quantity
		mm	In	mm	In	
IDC6	SS316	92.5	3.66	10	0.4	100/box
IDC10	SS316	130.6	5.14	10	0.4	100/box
IDC16	SS316	187.7	7.40	10	0.4	100/box



Marker Plates & Tags

Features-

Used to identify pipes, conduit, valves, cables and equipment in petrochemical plants, pulp and paper mills, refineries, offshore oil rigs and other harsh environments.

Marker Plates and Tags can be custom marked (laser system) to provide permanent identification.

Marker Plates and Tags							
Product Code	Material Grade	Length		Width		Package Quantity	Product Image
		mm	In	mm	In		
AT7407	SS316	74	3.0	7	0.28	100/ box	
AT8909	SS316	89	3.5	9.5	0.38	100/ box	
AT5019	SS316	50	2.0	19	0.75	100/ box	
AT8919	SS316	89	3.5	19	0.75	100/ box	
AT6338	SS316	63	2.5	38	1.50	100/ box	

Custom Marked tags- Laser Marking System






Features-

Used on stainless steel cable ties, strapping, marker plates and tags

BOLD block letters

Upper and lower case character capability

Alphanumeric and sequential numbering ability

Custom Marked Tags								
Product Code	Material Grade	Length		Width		Package Quantity	Product Image	Laser Etching Details
		mm	In	mm	In			
AT7407	SS316	74	3.0	7	0.28	100/ box		Single Line- Multiple Characters Laser Etching (No Embossing)
AT8909	SS316	89	3.5	9.5	0.38	100/ box		Single Line- Multiple Characters Characters height Option- 3mm & 4mm Laser Etching
AT5019	SS316	50	2.0	19	0.75	100/ box		Three Lines- Multiple Characters Characters height Option- 3mm & 4mm Laser Etching
AT8919	SS316	89	3.5	19	0.75	100/ box		Three Lines- Multiple Characters Characters height Option- 3mm & 4mm Laser Etching
AT6338	SS316	63	2.5	38	1.50	100/ box		Five Lines- Multiple Characters Characters height Option- 3mm & 4mm Laser Etching



RUBY ELECTRICAL CORPORATION

Specialist : Sheet Metal Components & Progressive Dies

J-18, Swastik Industrial Estate, Goddev Phatak Road,
Bhayander East, Dist.Thane, Pin - 401 105, INDIA.

Contact : +91 9820588817 / 9867337522

Email : ronak@rubyelectricalcorp.com

Website : www.rubyelectricalcorp.com